


Evaporative Emission Canister 17.15.13

Removal 

WARNING:


DO NOT SMOKE OR CARRY LIGHTED TOBACCO OR OPEN FLAME OF ANY TYPE WHEN WORKING ON OR NEAR ANY FUEL RELATED COMPONENTS. HIGHLY FLAMMABLE VAPORS ARE ALWAYS PRESENT AND MAY IGNITE. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN PERSONAL INJURY.

1. Remove the left-hand fender splash shield. <<501-02>>

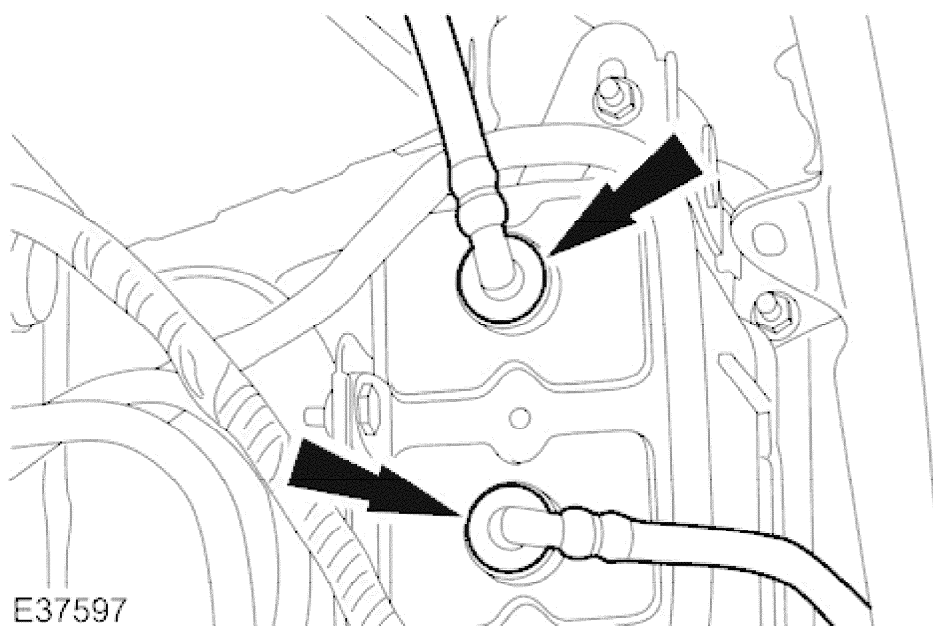

E37597

2. Disconnect the evaporative emission canister tubes.
 - Remove and discard the evaporative emission canister tube O-ring seals.
 - Cap the evaporative emission canister and tubes to prevent contamination.

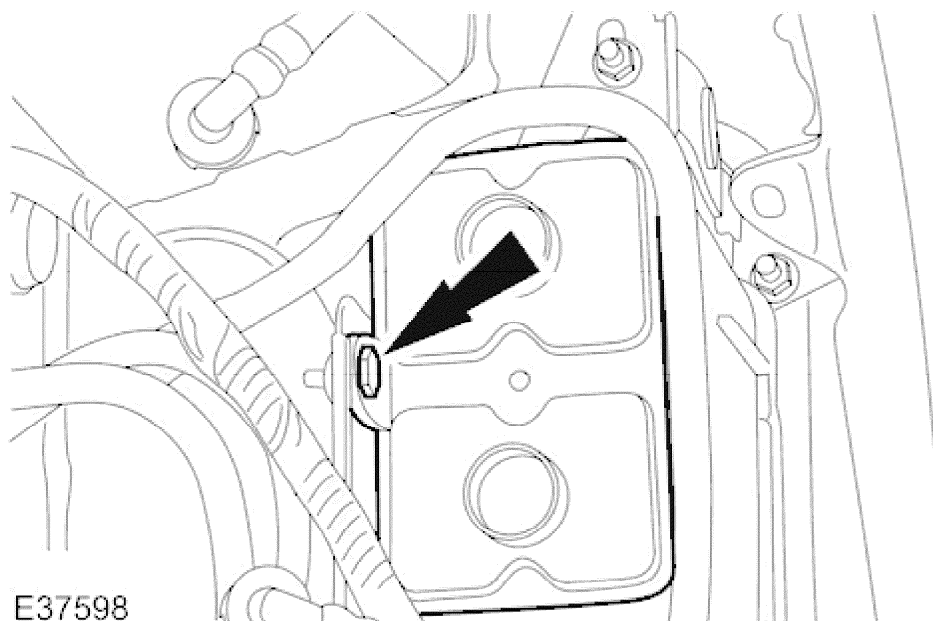


E37598

2001 XK RANGE - Evaporative Emissions - 303-13

3. Remove the evaporative emission canister.

Installation

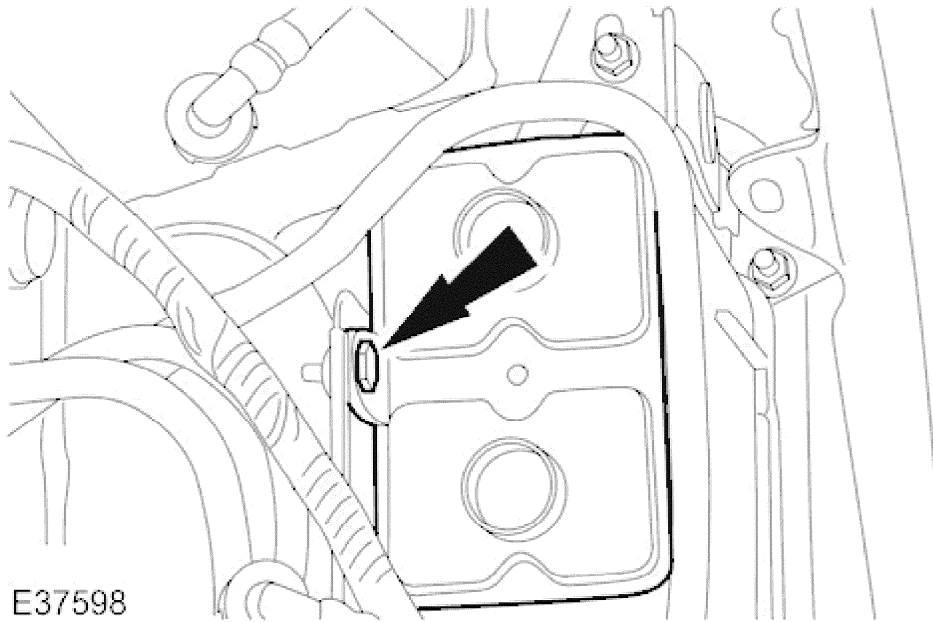

E37598

1. **NOTE:**

Install new evaporative emission canister tube O-ring seals.

To install, reverse the removal procedure.

- Tighten to 6 Nm.