

# JAGUAR X150

## FUEL SYSTEM


### Spring Lock Couplings

#### Special Service Tools




Fuel spring lock decoupling tool 310-D005


1. Release the fuel line safety clip.

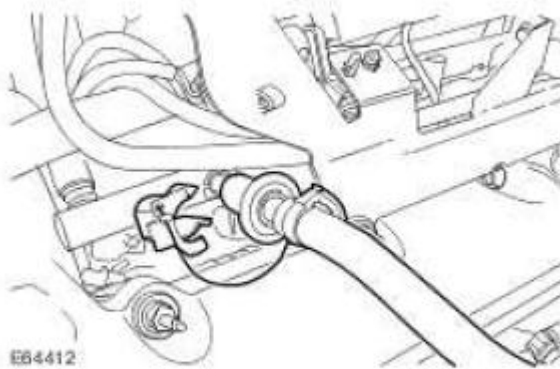

2. Install the special tool.

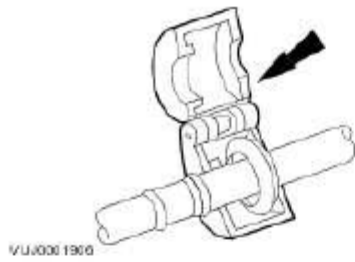


3. Close the special tool and push it into the female end of the spring lock coupling.

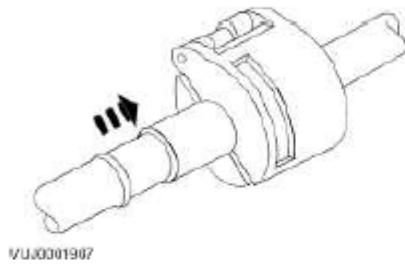


4. Disconnect the spring lock coupling.

- Position an absorbent cloth to collect fluid spillage.

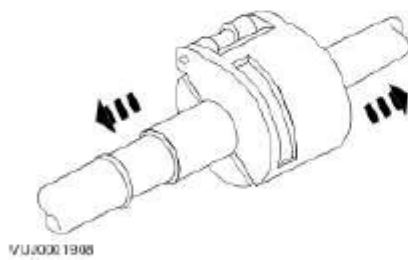


5. Remove the special tool.

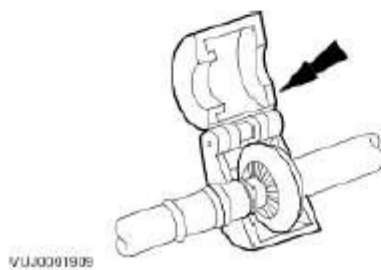


6. Connect the spring lock coupling.

- Clean the components.
- Install new O-ring seals.
- Install a new garter spring.

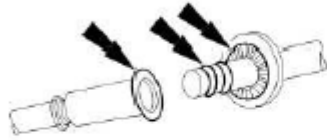

VUJ0001030

7. Check the spring lock coupling, to make sure it is correctly connected.

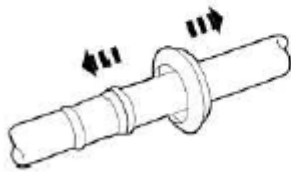

031440

8. Attach the fuel line safety clip.