

Center Stack Removal

Well, re-assembly ...but it's easy enough to figure it out from the re-assembly pics

Hardware and Tool(s)



Loose Grounding trap



In/out – Tight Clearance



Two Wing-nuts Secure the ski-slope




Pull 'em & stow 'em as soon as they are clear of the holes (or use your magnet to search the carpet....)



They'll slip away....



On Assembly, seat the top-edge of the
ski-slope:

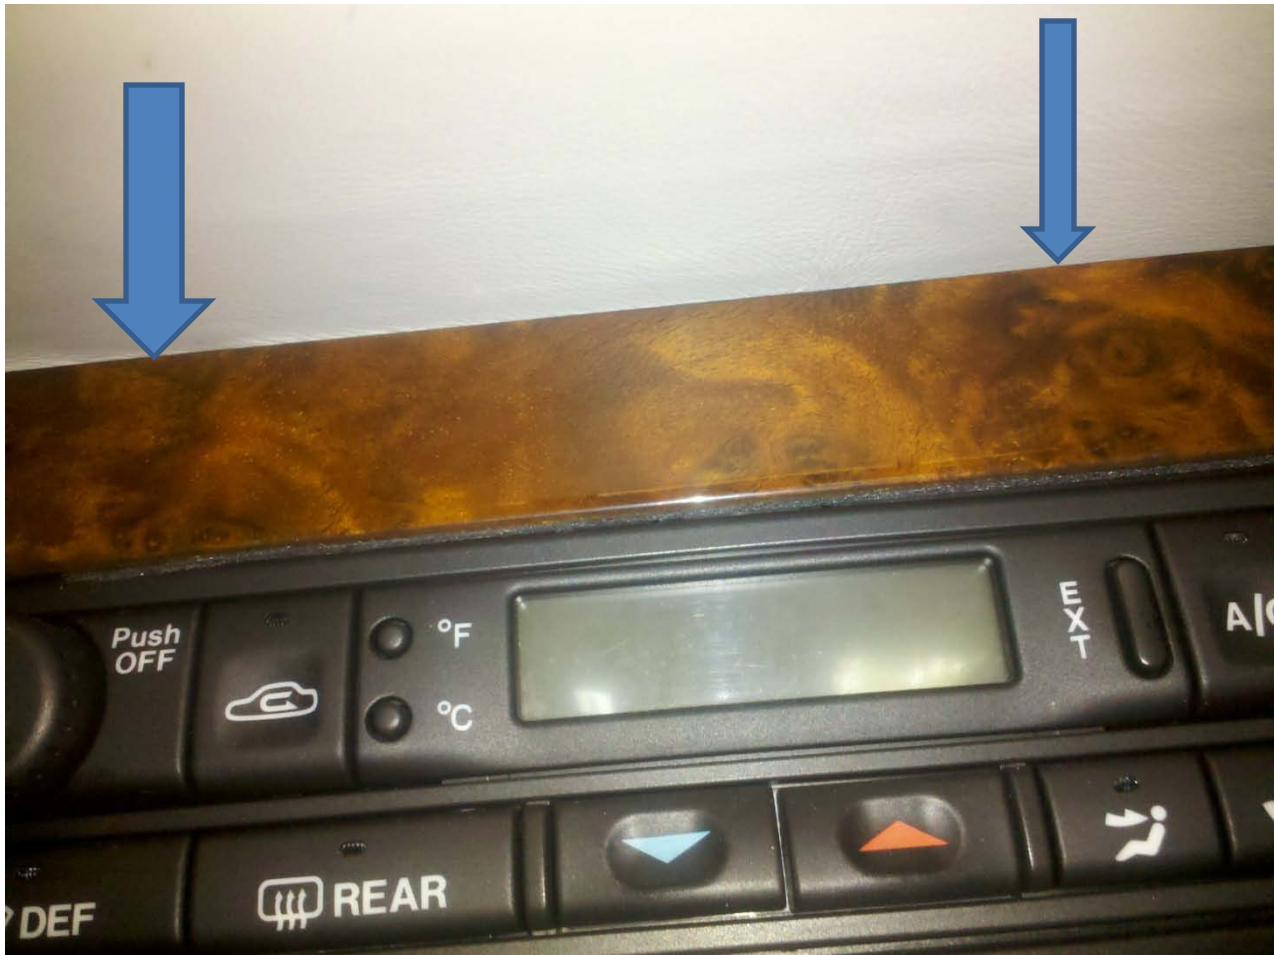

And lower the trailing edge into position



(replace the studs now)



Threshold Strip (note tabs)





Slide tabs under fascia and around fixing posts



I need the center box out of the way to connect the wires, no joy working it back past the white bar even though it came out ?!?



My center-surround tabs are all broken



4 Screws in the top corners of the center box completes it.

