
### Overhead Console 76.13.69


#### Removal

1. Remove battery cover and disconnect ground cable from battery terminal. Refer to <<86.15.19>>.

1

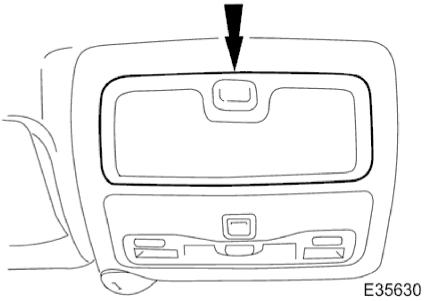


2. Open roof console sun glasses compartment.

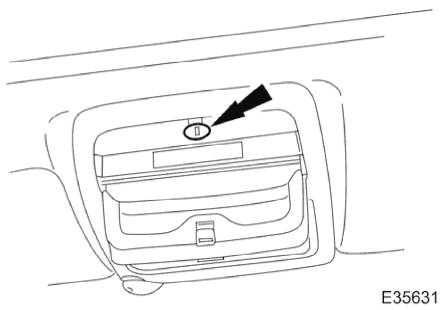

3. Rotate fastener 1/4 turn to release console.


2011-07-28

## 1999 XJ RANGE - Instrument Panel and Console - 501-12



E35629

4. Lower console from roof and disconnect lighting module harness multiplug and hands-free microphone harness multiplug if telephone is fitted.

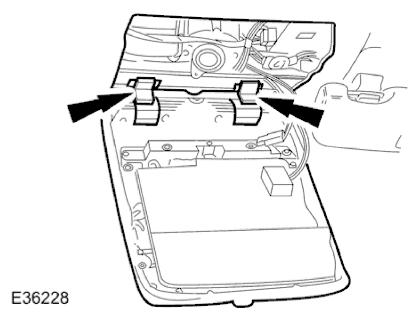

5. Release roof console from retaining clips and remove from vehicle.

### Installation

1. Position roof console at headlining and connect lighting harness multiplug and hands-free microphone multiplug if fitted.

2

2. Engage console in retaining clips.

2011-07-28

# 1999 XJ RANGE - Instrument Panel and Console - 501-12

- 3. Aligning with headlining aperture, seat console and rotate fastener 1/4 turn to secure.
- 4. Close sunglasses compartment.
- 5. Connect ground cable to battery terminal and fit battery cover. Refer to <<86.15.15>>.

3 2011-07-28