


Selector Lever Gate Finish Panel 76.25.24

Removal

1. Apply protective tape to veneer along each side of 'J' gate finisher.

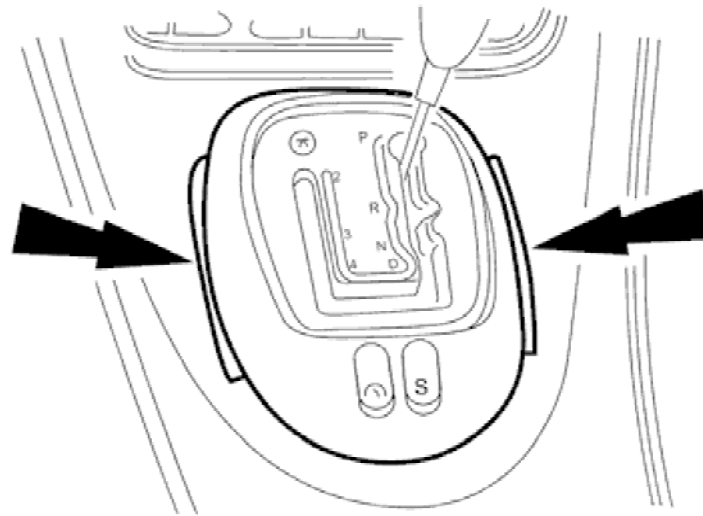

E36213

2. Using a screwdriver in the slot in front of the finisher, carefully lift the finisher and ease it from the 'J' gate surround.

Installation

1. Position finisher over gear selector.
2. Firmly seat finisher on veneer panel.
3. Remove protective tape from veneer panel and using a suitable cleaner, remove any residual adhesive.