
### Floor Console Finish Panel 76.47.26

#### Removal


- 1. Apply handbrake and turn ignition key to II.
- 2. Depress brake pedal, move gear selector to position N and turn ignition key to O.
- 3. Remove battery cover and disconnect cable from earth terminal. Refer to Section <<86.15.19>>.
- 4. Remove 'J 'gate finisher. Refer to <<76.25.24>>.

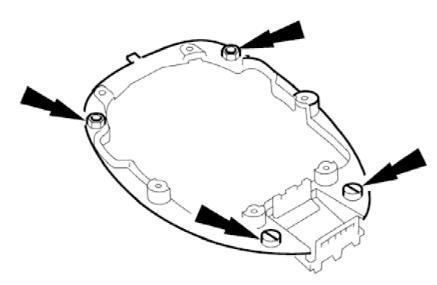

### E36214

5. Slacken and remove the two nuts and two screws securing the retaining panel.


2012-01-02

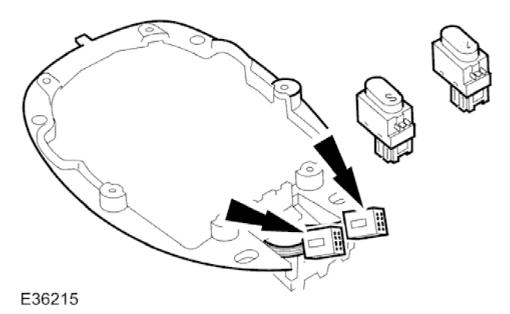

6. Position retaining panel for access, disconnect SPORT mode and cruise control ON/OFF switch multiplugs and remove retaining panel complete with switches.


2

2012-01-02

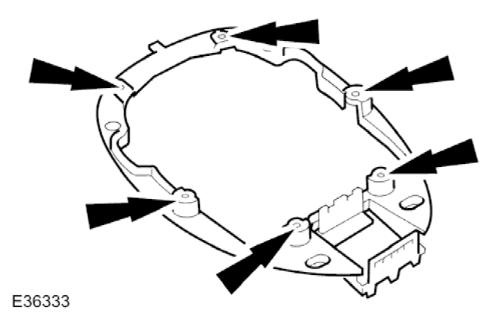

7. Remove and discard bushes from retaining plate.

3 2012-01-02

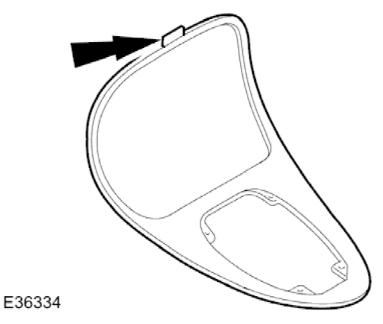

8. Carefully withdraw veneer panel, releasing front locating tongue from upper slot in comsole.

### Installation

- 1. Position veneer panel on console, ensuring that front tongue locates correctly in console upper slot.
- 2. Fit and fully seat new bushes in retaining panel.
- 3. Position retaining panel complete with SPORT mode and cruise control ON/OFF switches for access and connect multiplugs.
- 4. fully seat retaining panel and fit and tighten securing nuts and screws.
- 5. Fit 'J' gate surround finisher. Refer to <<76.25.24>>.

2012-01-02

6. Move gear selector to position P.

7. Connect cable to battery earth terminal and fit battery cover. Refer to Section <<86.15.15>>.

5 2012-01-02