


Audio Unit Housing 76.25.15

Removal

1. Remove centre console veneer panel. Refer to operations in this section.
2. Withdraw radio from console for access, disconnect multiplugs and aerial lead and remove radio from vehicle.

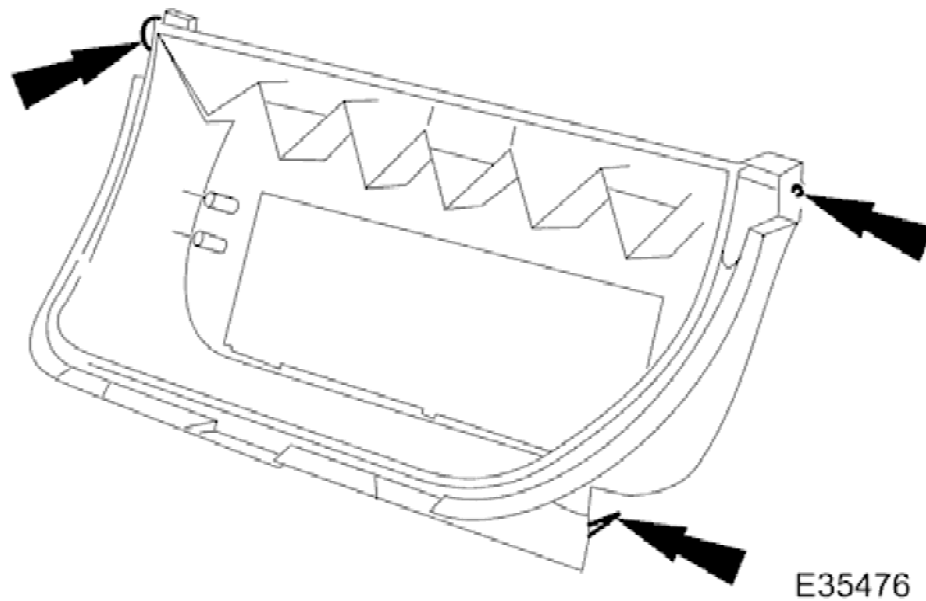

3. Remove console for access.
 1. Slacken and remove two screws securing radio console to fascia, release two dowels and withdraw console for access.
 2. Release clip retaining air conditioning panel harness.
4. Tilt bottom of radio console upwards and remove console from vehicle.

Installation

1. Position radio console for access and secure air conditioning harness in LH clip behind console.

2003 XJ RANGE - Instrument Panel and Console - 501-12

2. Fit console to BIW and fit and tighten securing screws.
3. Position radio at console and connect multiplugs and ground and aerial leads.
4. Fully seat radio in console.
5. Fit centre console veneer panel. Refer to <<76.47.26>>.
6. Fit 'J' gate finisher retaining panel. Refer to <<76.25.26>>.
7. Fit 'J' gate finisher. Refer to <<76.25.24>>.
8. Connect ground cable to battery terminal and fit battery cover. Refer to <<86.15.15>>.