
## 2001 XJ RANGE - Rear View Mirrors - 501-09

#### **Exterior Mirror Cover 76.10.55**


#### Removal

1. Remove exterior mirror glass. Refer to <<76.10.53>>. See page 2

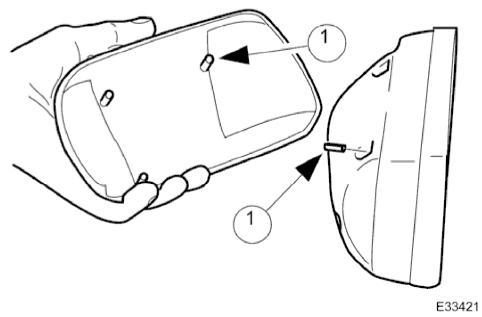

- 2. Remove exterior mirror cap.
  - 1. From housing interior, press out the three cap dowels complete with securing clips.
  - Remove mirror cap from casing.
  - Remove and discard the securing clips.

#### Installation

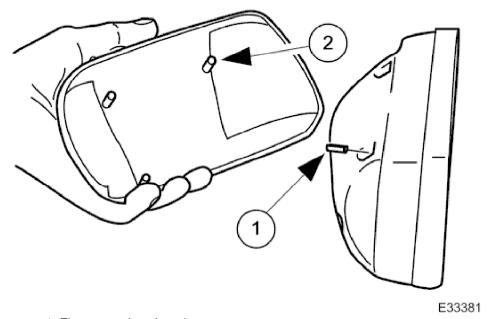

- 1. Fit cap to mirror housing.
  - 1. Fit and fully seat new cap securing clips in mirror base.
  - 2. Align mirror cap dowels with the securing clips and press firmly into place.

1

2. Fit mirror glass. Refer to <<76.10.53>>. See page 3

2013-03-29


# 2001 XJ RANGE - Rear View Mirrors - 501-09

#### **Exterior Mirror Glass 76.10.53**


# Removal

#### **CAUTION:**

If as a result of accidental impact, a powered fold-back mirror is moved 'out of position', it must only be re-positioned by initiating the fold-back sequence as described in this section. No attempt must be made to manually return the mirror to the normal position. Failure to adopt this procedure will result in vibration of the unlocked mirror head and consequent loss or distortion of rear vision.

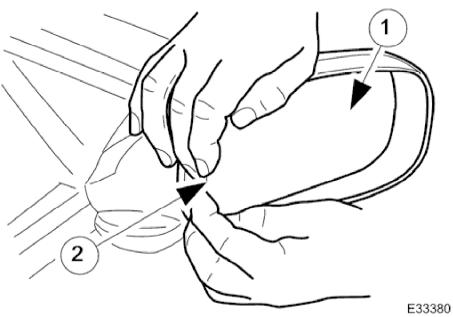

- 1. Remove exterior mirror glass.
  - 1. Motor glass to fully inward position.
  - 2. Pressing inner edge of glass outwards, ease outer extremity rearwards away from mirror housing.

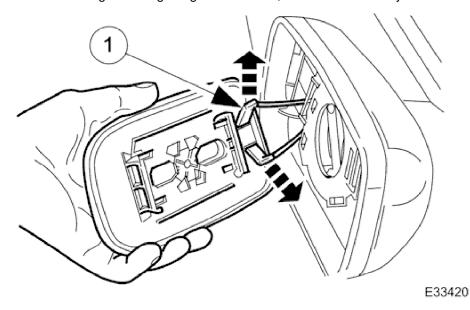

2. Disconnect and remove mirror glass.


1. Ease glass clear of base, disconnect the two spade connectors and remove glass from mirror housing.

2

2013-03-29

# 2001 XJ RANGE - Rear View Mirrors - 501-09

### Installation



E33423

- 1. Fit glass to mirror housing.
  - Holding glass in position, connect the two spade connectors.
  - Engage the mirror inner retainer on the motor lug and press the mirror outer edge forward to engage the outer retainer.

3 2013-03-29