

TECHNICAL BULLETIN



Tappet Block to Cylinder Head Joint – Use Loctite 518 “Master Gasket”

12-51

MODEL All V12 Engines

DATE 8/94

ISSUE:


Loctite 518 “Master Gasket” is the specified sealant for the Tappet Block to Cylinder Head joint.

ACTION;

For all V12 engines, use Loctite 518 “Master Gasket” to seal the tappet block to cylinder head joint. The sealing surface must be clean and dry before applying the sealant.

Use Hylosil RTV sealant on the half moon seal at the rear of the camshaft carrier.

Do not use a sealant on the camshaft cover gasket.

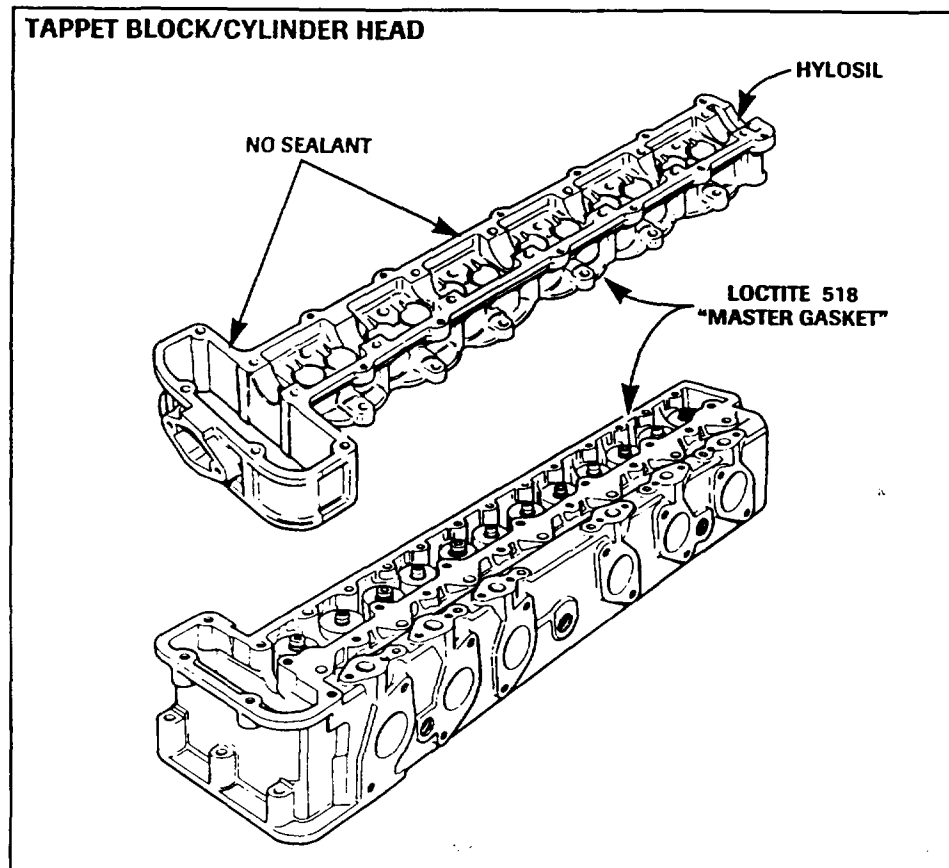

.....
Index # 040028
.....