


6 . Remove the window control switch.

- ▶ Release from the 3 clips.
- ▶ Disconnect the electrical connector.

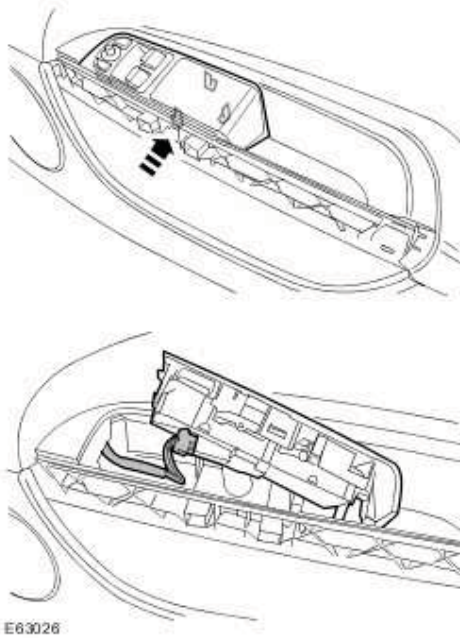

7 . Remove the seat control switch.

- ▶ Remove the 4 Torx screws.
- ▶ Disconnect the electrical connector.