

## Instrument Cluster (88.20.01)

### Removal


1 **NOTE:**


Make sure all smart keys are available before a new instrument cluster is installed.

If a new instrument cluster is being installed, all smart keys must be cleared from the passive anti-theft system (PATS), using the Jaguar approved diagnostic equipment prior to the instrument cluster removal.

2 . Remove the instrument panel driver's side reinforcement trim panel.


▶ Carefully release the 4 clips.

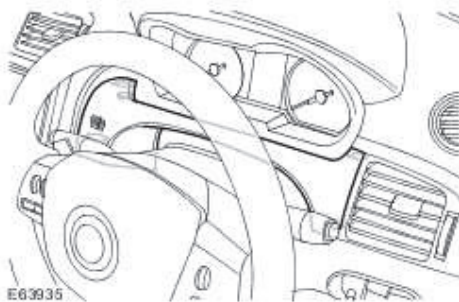

3  **CAUTION: Protect the surrounding trim from damage when changing the component.**


Remove the instrument cluster surround.

▶ Remove the 3 screws.

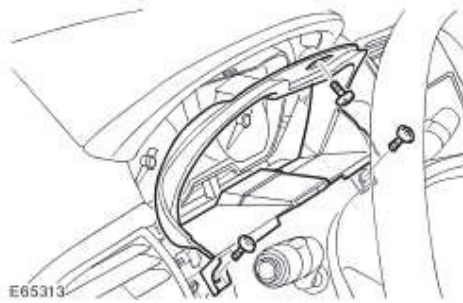


4 . Remove the instrument cluster.


- ▶ Raise the steering column finisher for access to the lower screws.
- ▶ Remove the 4 screws.
- ▶ Disconnect the 2 electrical connectors.

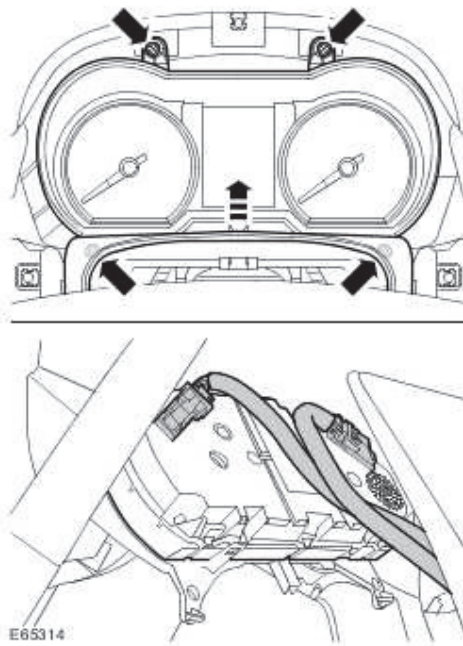


## Installation

1 . Install the instrument cluster.

 Connect and secure the electrical connectors.

 Install the screws.

2 . Install the instrument cluster surround.

 Install the screws.

3 . Install the instrument panel driver's side reinforcement trim panel.

 Align the pegs and secure with the clips.

**4 NOTE:**

Make sure all smart keys are available before the new instrument cluster is installed.

Using the Jaguar approved diagnostic equipment, programme the new instrument cluster and reprogram all of the smart keys to the vehicle.