



Rear Spoiler (76.19.86.60)

Removal

- 1 . Remove the high mounted stoplamp.
For additional information, refer to [High Mounted Stoplamp \(86.41.01\)](#)
- 2 . Release the rear spoiler.
 - ▶ Remove the 2 nuts.

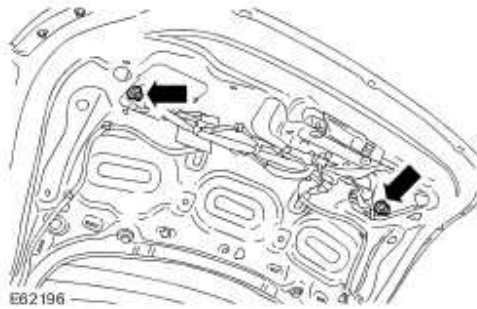

- 3 . Remove the rear spoiler.
 - ▶ Remove the 3 Torx screws.
 - ▶ Release the 2 clips.

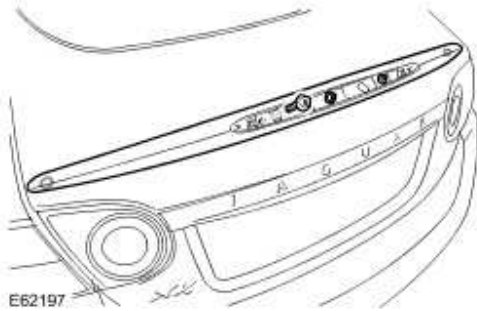

Installation

- 1 . Install the rear spoiler.
 - ▶ Secure with the clips.
 - ▶ Fit and tighten the Torx screws.
 - ▶ Tighten the nuts to 10 Nm (7 lb.ft).