


2002 XK RANGE - Convertible Top - 501-18

Position a piece of absorbent cloth below hydraulic cylinder to protect paintwork from any fluid spillage.

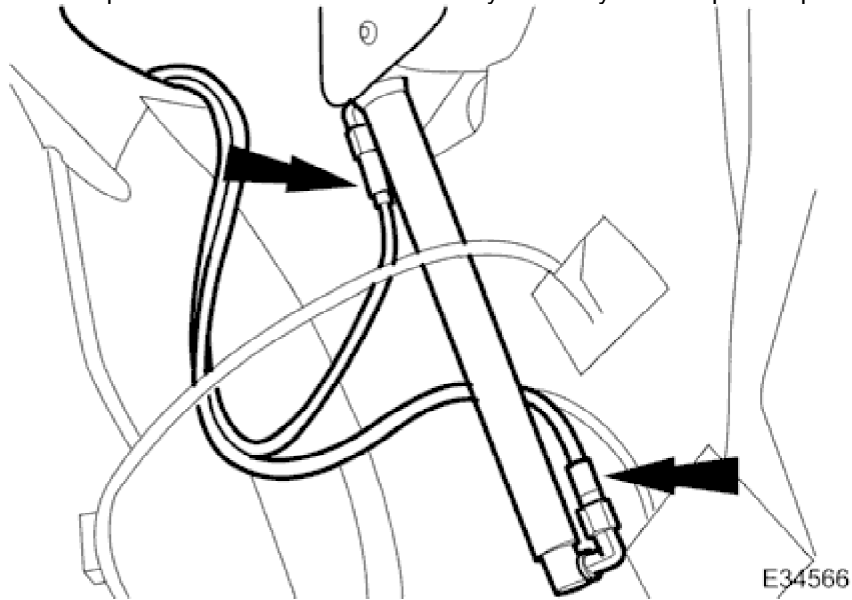


17. Fit blanking plugs to hydraulic cylinder and hose connectors.

18. Remove hydraulic cylinder from vehicle.

1. Remove blanking plugs from hose and pump connectors.


2. Install new 'O' ring seals in hose connectors.

3. Position hydraulic cylinder in vehicle and ensuring correct orientation as marked during removal, fit and tighten hose connectors to cylinder.

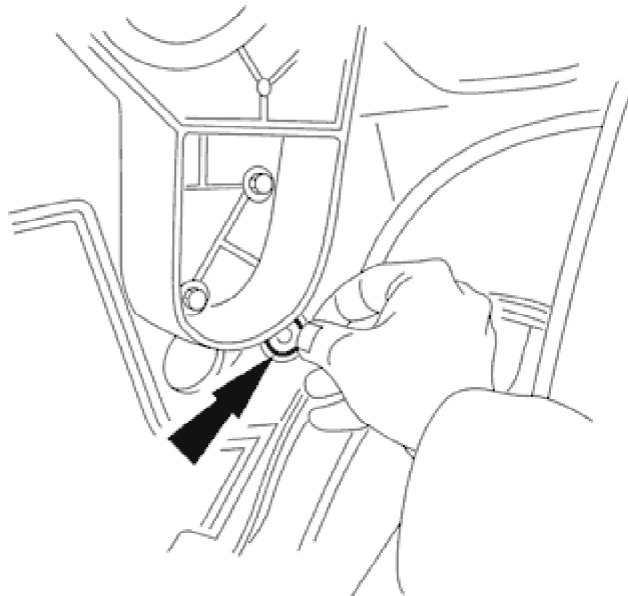


4. Fit wavy washer to mounting bracket pivot and install and fully seat hydraulic cylinder on pivot.

2002 XK RANGE - Convertible Top - 501-18

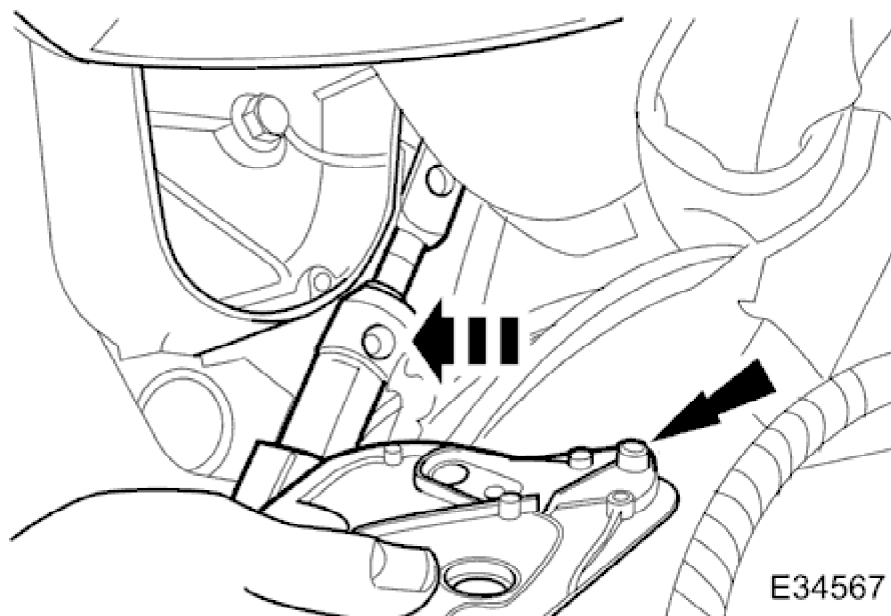

5. Fit mounting bracket cover plate, ensuring that inner half pivot locates in cylinder recess and fit and tighten upper securing screws.

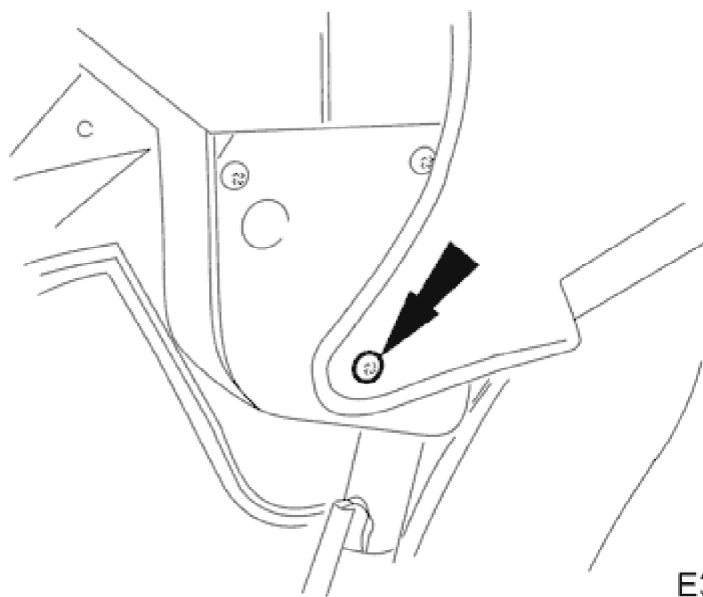

E35723