

**METRIC**  
IF IN DOUBT ASK

TPS280DP Performance

ISS	DATE	DRAWN	ECR No.	CHK	APP
3B	06/01/10	D.R.	10582/9	I Hurst	I Hurst

**Electrical Data**

Measurement range: 20° - 360° in 1° increments  
 Supply voltage: 9V to 30Vdc Unregulated or 5Vdc ± 0.5Vdc Regulated  
 Supply current: ≤ 25mA (12.5mA Per Channel)  
 Supply reverse polarity protection: Yes  
 Short circuit protection output to GND: Yes  
 Short circuit protection output to supply: In 5V regulated mode only  
 Over voltage protection: Up to 40V (-40 to +60°C)  
 Power on settlement: < 1s  
 Resolution: 12 Bit (0.025% of measurement range)  
 Non-linearity: < ± 0.4%  
 Temperature coefficient: < ± 30ppm/°C in 5V regulated supply mode  
 < ± 90ppm/°C in 9-30V supply mode

**Output (See Fig 2)**

Options: Ratiometric analogue, PWM or Absolute analogue  
 Direction: Factory programmed to increase or decrease with CW shaft rotation

**Analogue Output Option (0.5V - 4.5V)**  
 Voltage output range (9-30V Supply): Absolute voltage from 0.5V to 4.5V over measurement range (± 3%)  
 Voltage output range (5V Supply): Ratiometric output voltage from 10% to 90% (± 1%) of V<sub>Supply</sub> over measurement range  
 Monotonic range: 0.25V (5%) and 4.75V (95%) nominal

**Analogue Output Option (0.1V - 4.9V)**  
 Voltage output range (9-30V Supply): Absolute voltage from 0.1V to 4.9V over measurement range (± 3%)  
 Voltage output range (5V Supply): Ratiometric output voltage from 2% to 98% (± 1%) of V<sub>Supply</sub> over measurement range  
 Monotonic range: 0.05V (1%) and 4.95V (99%) nominal

Load resistance: 10KΩ minimum (resistive to GND)  
 Output noise: ≤ 1 mVrms  
 Input/Output Delay: 2.5ms Typ  
 0.15ms (See Ordering Code)

**PWM Output Option**  
 PWM frequency: 244Hz (STD) ± 20% over temperature range. For 500Hz & 1000Hz see ordering code  
 PWM levels (9-30V Supply): 0V and 5V Nominal (± 3%)  
 PWM levels (5V Supply): 0V and V<sub>Supply</sub> (± 1%)  
 Duty cycle: 10% to 90% over measurement range  
 Monotonic range: 5% 95% nominal  
 Load resistance: 10KΩ minimum (resistive to GND)  
 Rise/Fall time (244Hz, 500Hz & 1000Hz): < 15µs typical

**Mechanical Data**

Mechanical angle: 360° continuous  
 Torque: 10 g·cm  
 Max. Operating speed: 3600 °/s  
 Weight: < 30g  
 Mounting: 2 x M4 screws  
 Cable exit: 4-core cable FDR-25 Sheathed 55A Spec Wire (Black = GND, Red = V<sub>+</sub> Supply, Yellow = Output 1, White = Output 2)

**Phasing**  
 Sensor is at mid electrical angle when shaft and cable exit are aligned as shown in Fig 1




**Environmental**

Operational temperature range (5V Version): -40 to +140°C Continuous (See Fig 3), Tested to 170°C for 72 hours  
 Operational temperature range (9-30V Version): -40 to +135.7°C with V<sub>Supply</sub> = 9Vdc  
 Derate upper temperature limit by 1.7°C for each 1V increase in V<sub>Supply</sub>  
 e.g. -40 to 100°C with V<sub>Supply</sub> = 30Vdc (see note below)  
 Sealing: IP68 and IP69K



Note: Excessive temperature will cause the internal voltage regulator to shut down to protect the circuit from damage through overheating.

Tested to:

Storage temperature: -55 to +140°C  
 Vibration: BS EN 60068-2-64; 1995 Sec 8.4 (31.4grms) 20 to 2000Hz random  
 Shock: 3m Drop onto concrete and 2500g  
 Life: 30 Million Cycles  
 Electromagnetic Interference: BS EN 61000-4-3 to (100V/m), 80MHz to 1GHz and 1.4GHz to 2.7GHz  
 2004/108/EC  
 BS EN 60068-2-11; 1999 Severity 48 Hours  
 Ethylene Glycol  
 Brake Fluid  
 Engine Oil (Mineral)  
 Engine Oil (Synthetic)  
 Engine Degreaser  
 Screen Wash  
 Petroleum Spirit  
 Diesel

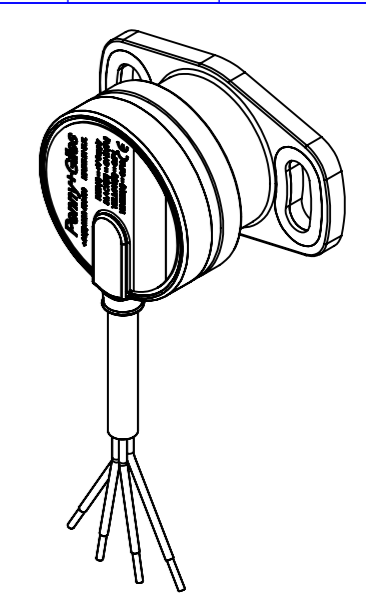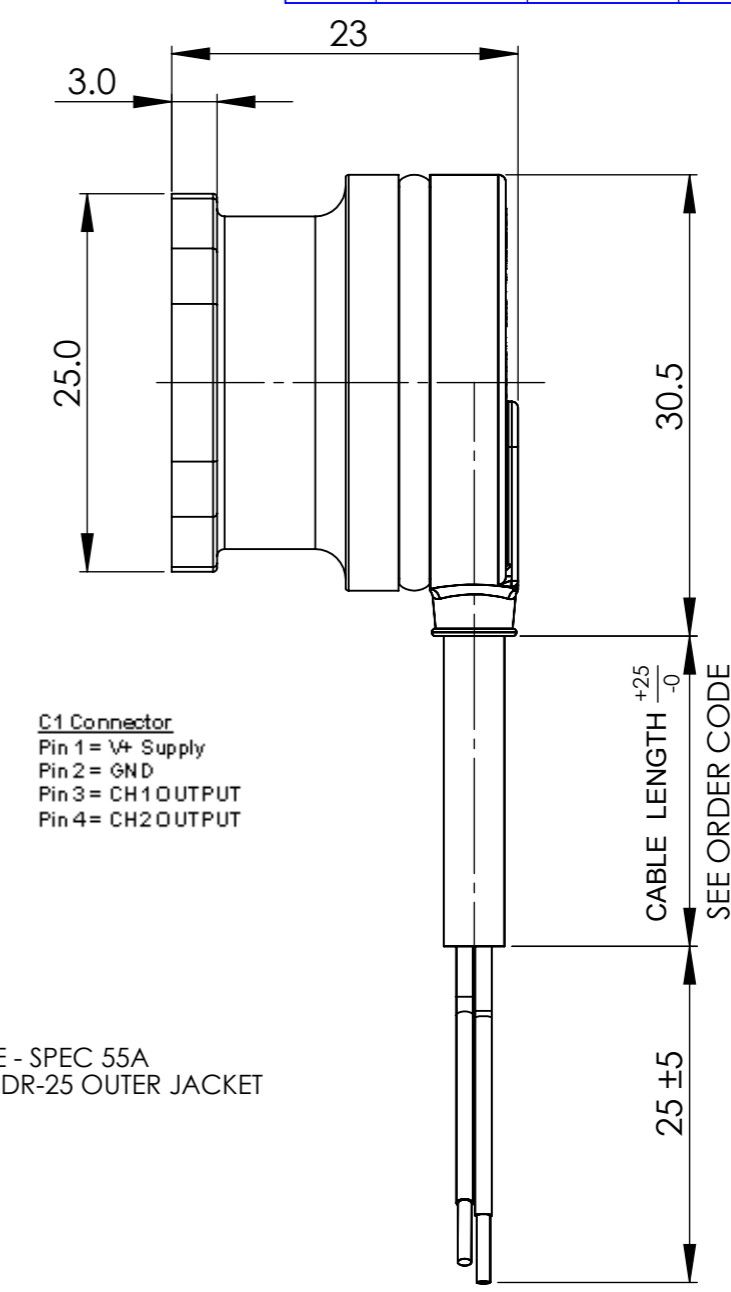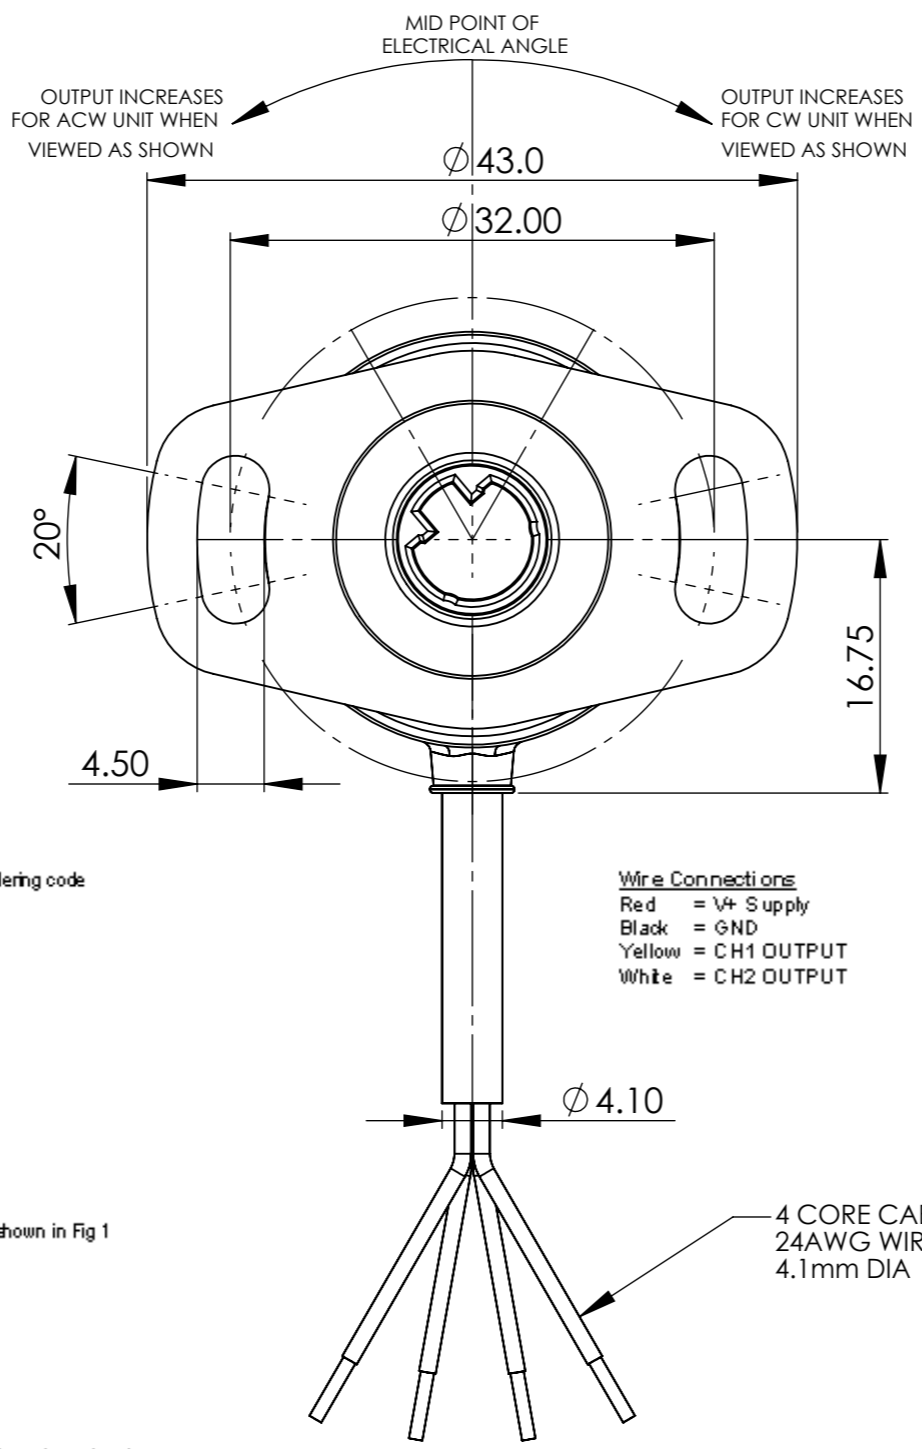

**CONNECTOR OPTION DETAILS (Mini Sure Seal MSS4R)**

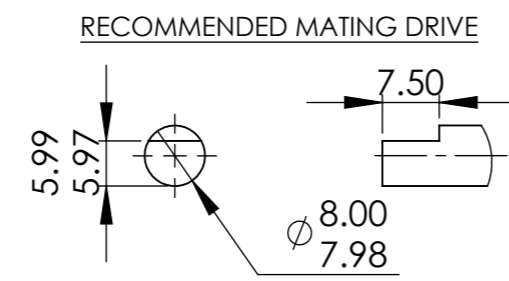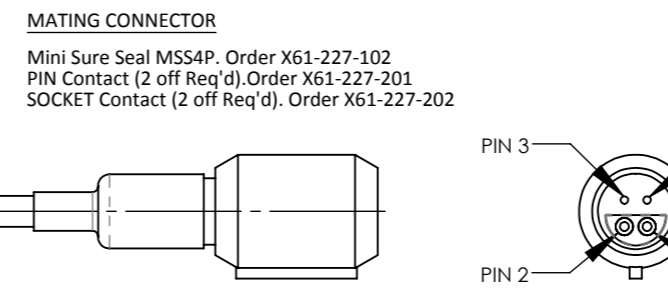

**Ordering Codes**

TPS 280 DP - / - / - / -

Angle CH1 .....  
 Angle CH2 .....  
 Output -  
 A1 = Analogue 0.5V - 4.5V  
 A4 = Analogue 0.1V - 4.9V  
 A6 = Analogue 0.5V - 4.5V With 0.15ms Input/Output Delay  
 A7 = Analogue 0.1V - 4.9V With 0.15ms Input/Output Delay  
 P1 = PWM - 244Hz  
 P2 = PWM - 500Hz  
 P3 = PWM - 1000Hz  
 Direction Code .....  
 3. = Both Clockwise  
 4. = Both Anticlockwise  
 5. = CH1 Clockwise, CH2 Anticlockwise  
 Cable Code .....  
 P2 = 0.2m  
 P5 = 0.5m  
 Connector Code .....  
 C0 = No Connector  
 C1 = Mini Sure Seal

SCALE <b>2:1</b> UNLESS STATED	IF CONTROL DIMENSIONS (Kc) ARE SPECIFIED THEY ARE TO BE SUBJECT TO 100% INSPECTION OR STATISTICAL PROCESS CONTROL	D No <b>TPS280DP</b>	MATERIAL <b>BODY - POLYMER</b> <b>SHAFT INSERT - POLYMER</b>	TOLERANCES: IN-LINE WITH PENNY & GILES STANDARDS 55-301 SURFACE TEXTURE VALUES IN MICROMETRES (µm) TO BS1134:PT2. ALL MACHINED SURFACES TO BE 1.6 ALL SCREW THREADS TO BS3643 PT.2: EXTERNAL CLASS: 6g INTERNAL CLASS: 6H	TITLE <b>THROTTLE POSITION SENSOR</b>	<b>PENNY + GILES</b>	<b>A3</b>			
THIRD ANGLE PROJECTION TO BS 8888	MASS (g)	VOL. (mm <sup>3</sup> )	REF.	FINISH	ANGULAR ± 1°	LINEAR 0. mm 0.0 mm 0.00mm 0.000mm	(MACHINING) +/- 0.5 mm +/- 0.2 mm +/- 0.1 mm +/- 0.01 mm	BREAK EDGE 0.05 - 0.15mm FILLET RADS 0.1 - 0.3mm UNLESS OTHERWISE STATED	PART NUMBER: <b>TPS280DP</b>	SHT 1 OF 2 SHTS

**METRIC**  
IF IN DOUBT ASK

ISS	DATE	DRAWN	ECR No.	CHK	APP
3B	06/01/10	D.R.	10582/9	I Hurst	I Hurst

FIG 1

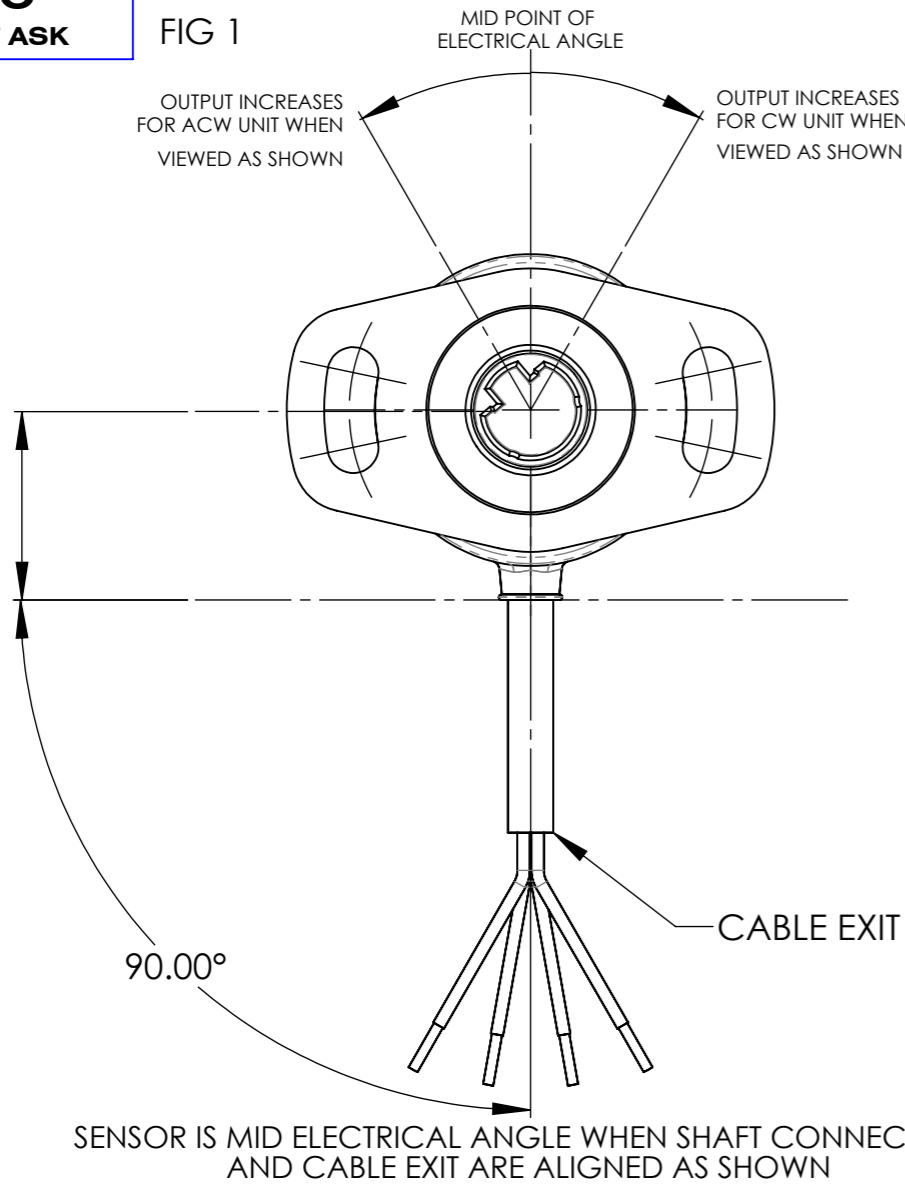


FIG 2

**Output law for 3 different angles**



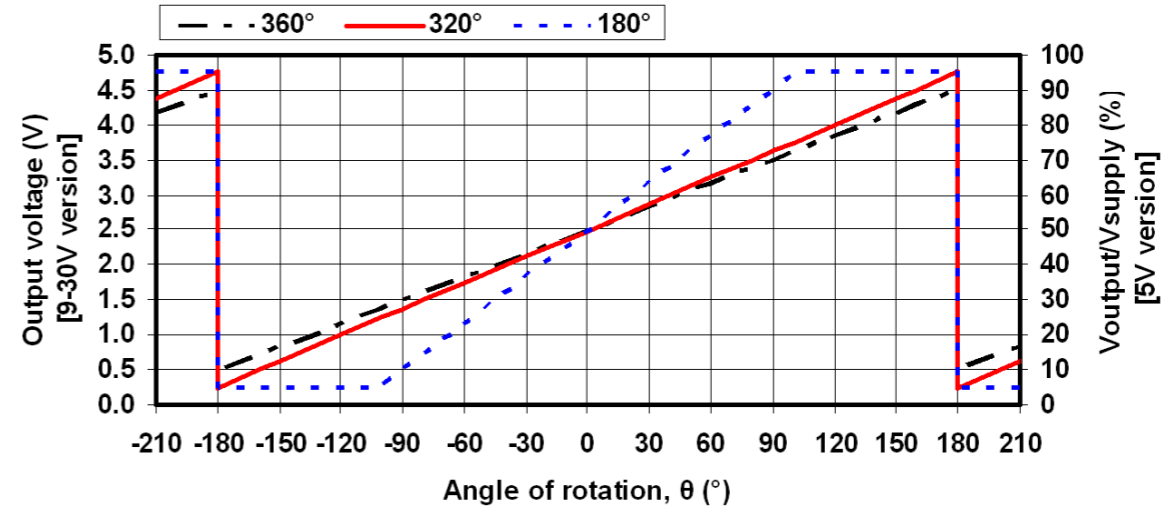


FIG 3

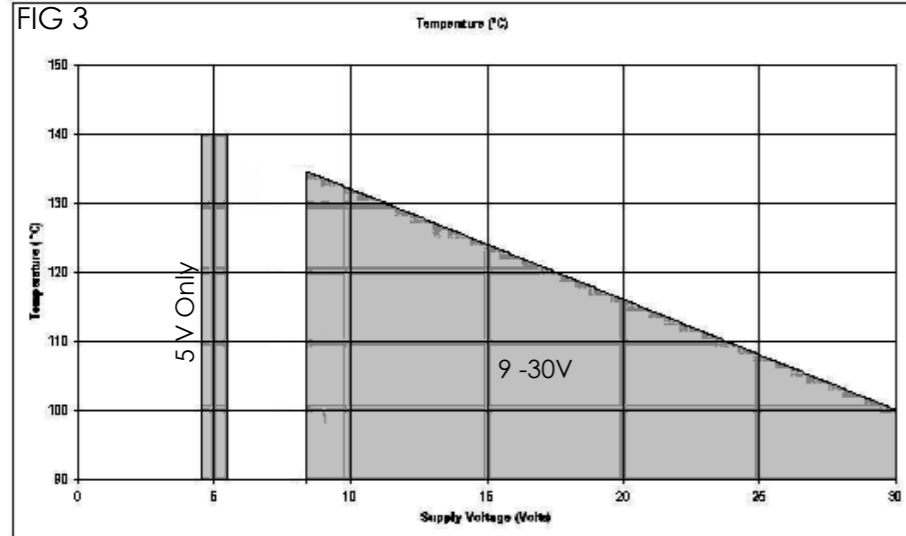


MAX OPERATING TEMPERATURE DERATING

FIG 4

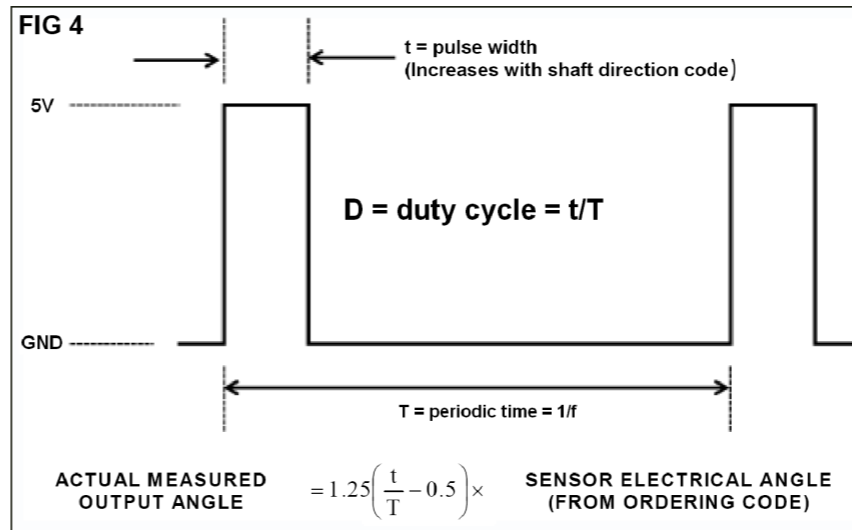

PWM OUTPUT CHARACTERISTICS

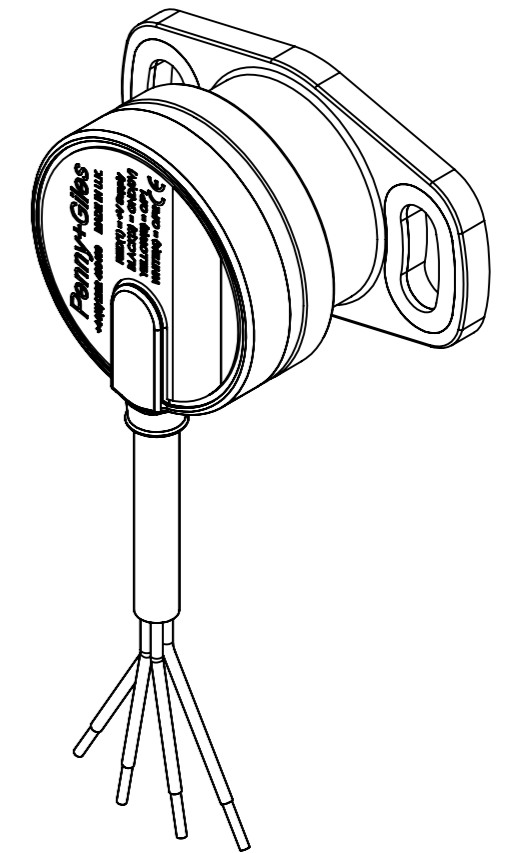

SCALE <b>2:1</b> UNLESS STATED	IF CONTROL DIMENSIONS (Kc) ARE SPECIFIED THEY ARE TO BE SUBJECT TO 100% INSPECTION OR STATISTICAL PROCESS CONTROL.	D No <b>TPS280DP</b>	MATERIAL <b>BODY - POLYMER</b> <b>SHAFT INSERT - POLYMER</b>	TOLERANCES: IN-LINE WITH PENNY & GILES STANDARDS 55-301 SURFACE TEXTURE VALUES IN MICROMETRES (µm) TO BS1134:PT2. ALL MACHINED SURFACES TO BE 1.6 ✓ ALL SCREW THREADS TO BS3643 PT.2: EXTERNAL CLASS: 6g INTERNAL CLASS: 6H	TITLE <b>THROTTLE POSITION</b> <b>SENSOR</b>	<b>PENNY + GILES</b>	<b>A3</b>
THIRD ANGLE PROJECTION TO BS 8888	MASS (g) <b>16.69</b>	VOL. (mm <sup>3</sup> ) <b>14648.76</b>	FINISH	ANGULAR ± 1° LINEAR 0, mm +/- 0.5 mm 0,0 mm +/- 0.2 mm 0,00mm +/- 0.1mm 0,000mm +/- 0.01mm (MACHINING) BREAK EDGE 0.05 - 0.15mm FILLET RADS 0.1 - 0.3mm UNLESS OTHERWISE STATED		PART NUMBER: <b>TPS280DP</b>	SHT 2 OF 2 SHTS