

EXTERIOR LIGHTING

REAR FOG LAMP - SPORTBRAKE [G2136524]

REMOVAL AND INSTALLATION


86.40.73	TAILGATE LAMP ASSEMBLY?- RENEW	SPORTBRAKE	0.30	USED WITHINS	+
86.40.74	TAILGATE LAMP ASSEMBLY - PAIR - RENEW	SPORTBRAKE	0.40	USED WITHINS	+

PART(S)

STEP	PART NAME	QUANTITY
Installation Step 5	Tailgate finisher	1

REMOVAL


1.

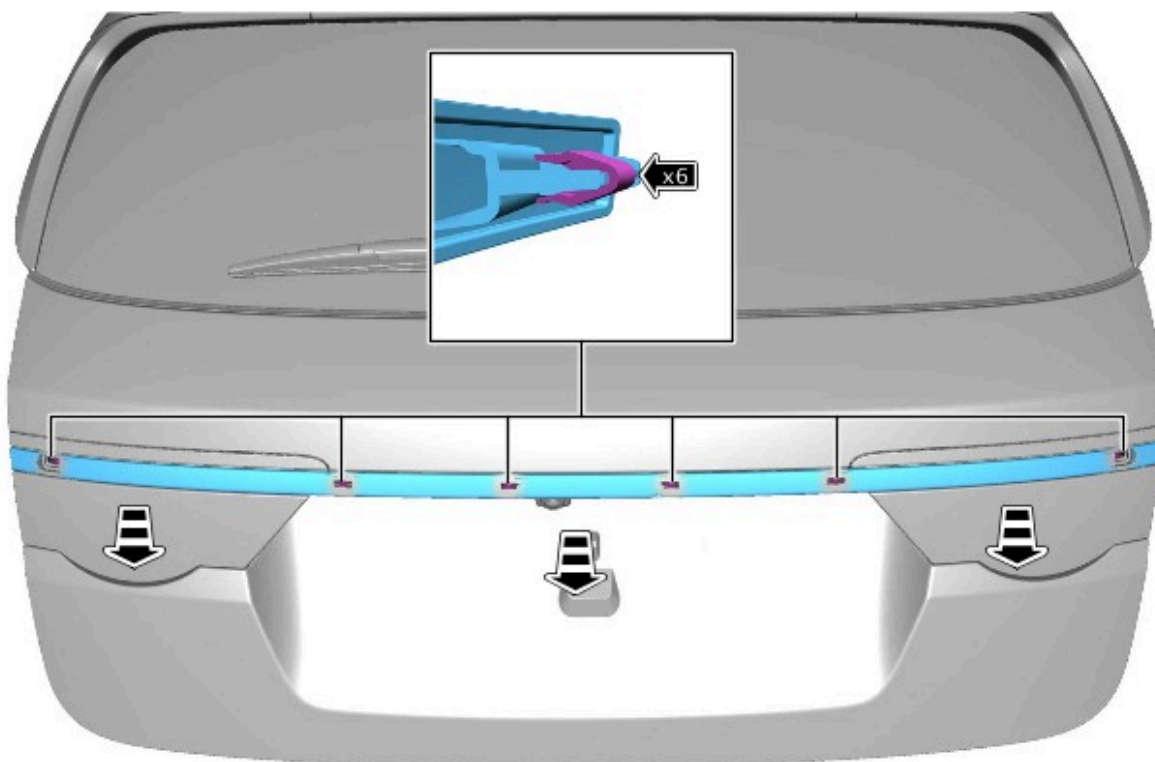

E205548

Remove and discard the tailgate trim finisher.

2.

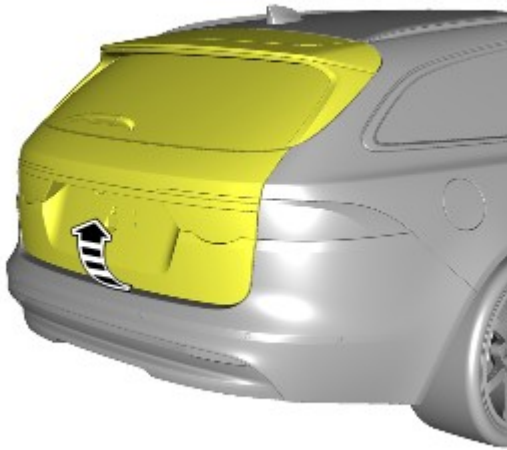


E205547

Open the tailgate.

3. Remove the tailgate trim panel.

Refer to: [Tailgate Trim Panel - Sportbrake](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).


4.

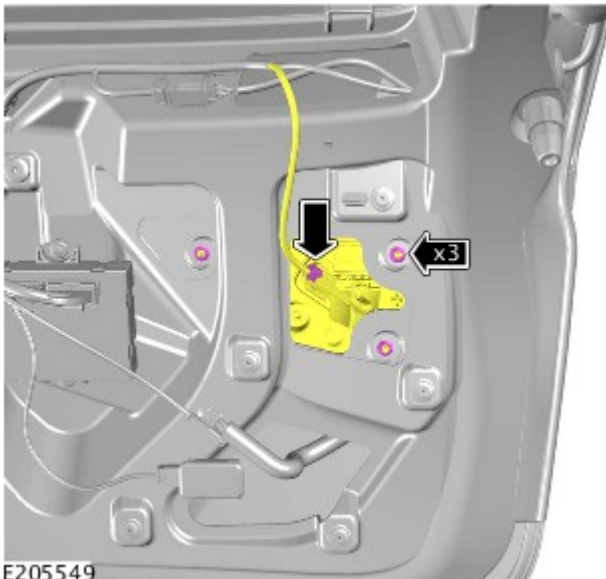

E205549

- Disconnect the electrical connector.
- Remove the 3 nuts.

5.

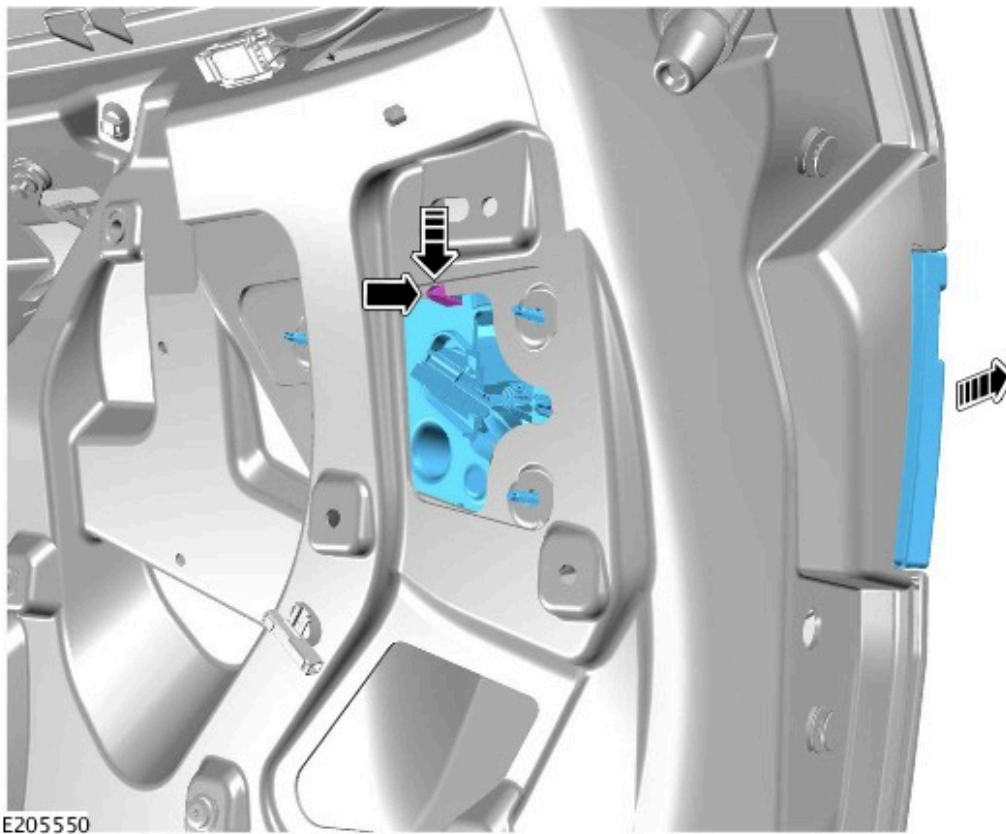

E205550

- Carefully release the clip.
- Remove the rear fog lamp.

INSTALLATION

1.

CAUTION:

Make sure that the retaining clip is secured correctly.

Install the rear fog lamp.

2.

- Install and tighten the 3 nuts.
Torque: 1.9Nm
- Connect the electrical connector.

3.


Install the tailgate trim panel.

Refer to: [Tailgate Trim Panel - Sportbrake](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).

4.

Close the tailgate


5.

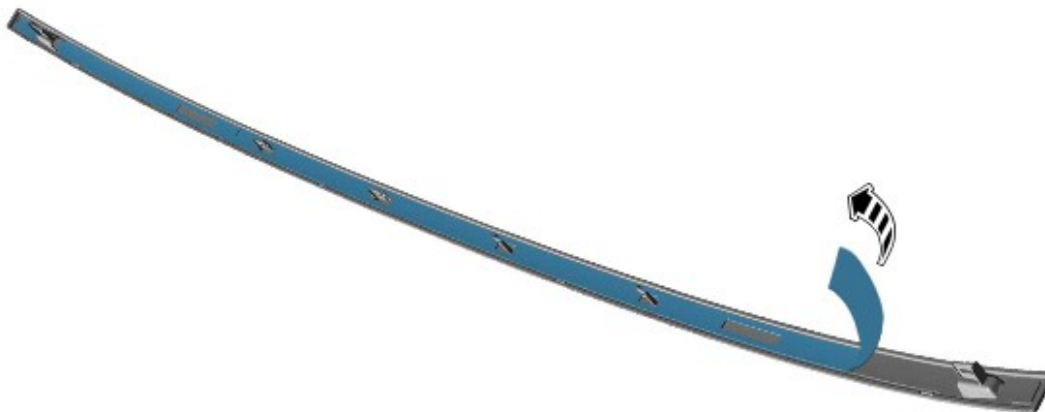

E205907

- Install the new tailgate trim finisher.
Renew Part: [Tailgate finisher](#) Quantity: 1.
- Remove the protective covers from the adhesive pads.

6.

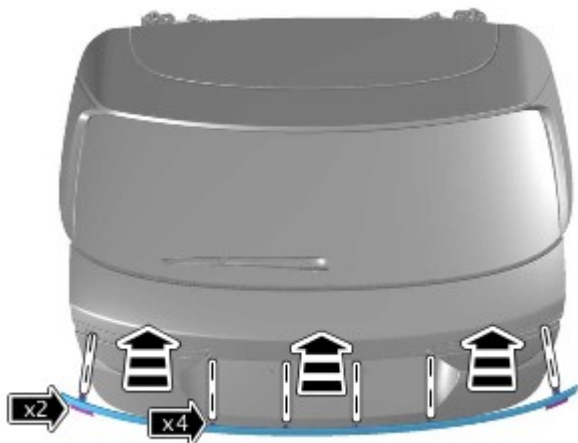

E205906

Install the new tailgate trim finisher.

amF5b2izaW87MjAyNi0wNC0xNiQxOTt1NjowMj4xNjIwOzE2NS4yMjUuMjstLjUzOv==

PUBLISHED: 02-JUN-2017
2018.0 XF (X260), 501-05

INTERIOR TRIM AND ORNAMENTATION

TAILGATE TRIM PANEL - SPORTBRAKE [G214-9209]

REMOVAL AND INSTALLATION

CAUTION:

Use a suitable plastic trim tool to release the component.

NOTE:

This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.


1.



E206244

Release the 2 fixings.


2.

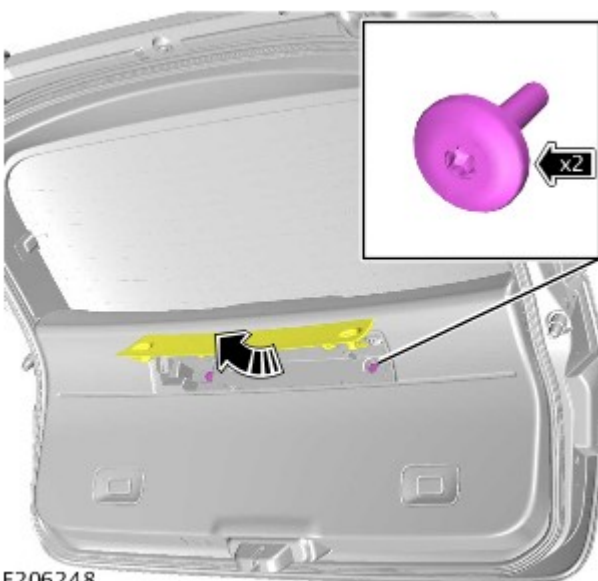

E206248

- Open the access cover.
- Remove the 2 bolts.

3.

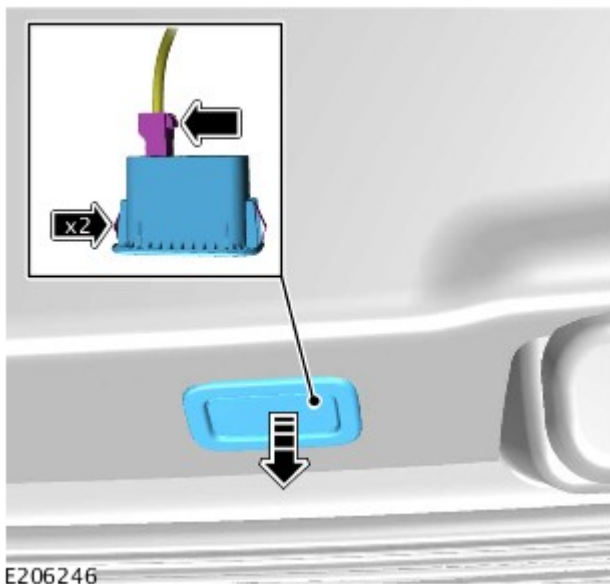


- Remove the power tailgate close switch.
- Disconnect the electrical connector.

4.


NOTE:

Do not remove the component at this stage.

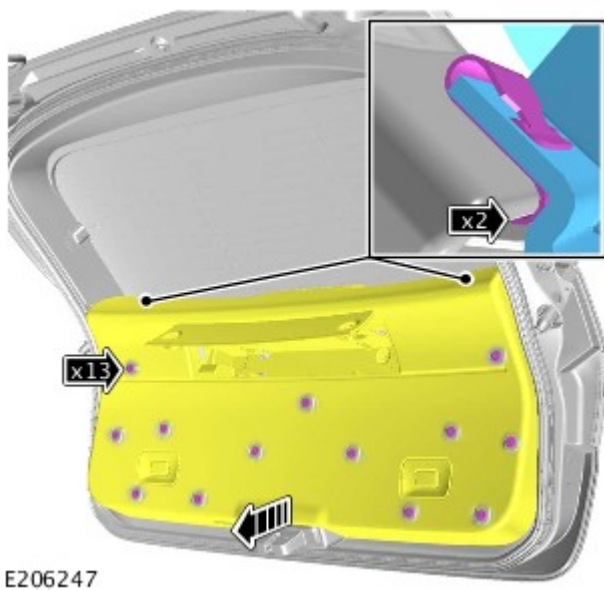

Release the tailgate inner trim panel.

5.

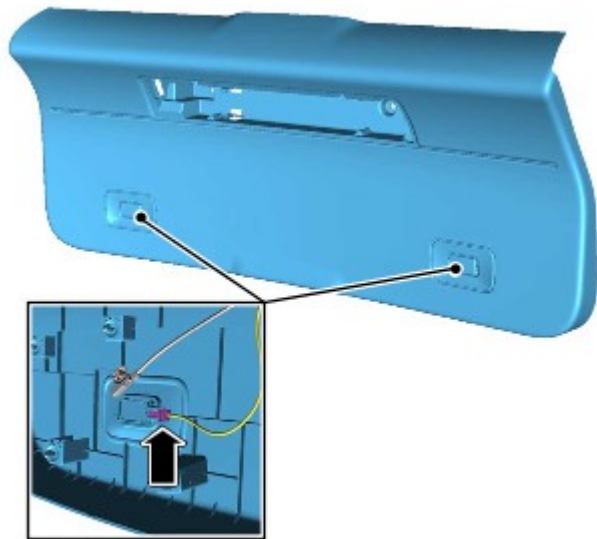


E206243

- Disconnect the luggage compartment lamp electrical connector.
- Remove the tailgate trim.

6.

NOTE:

- The step must be carried out on both sides.
- Only carry out the following step(s) if the new component is to be installed.

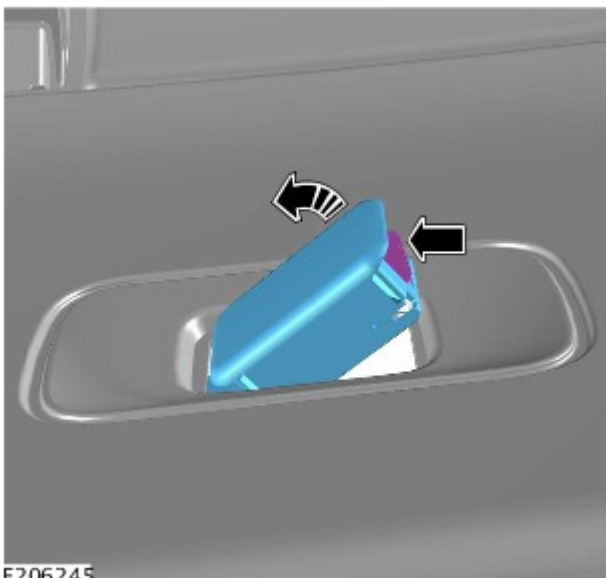

E206245

Remove the luggage compartment lamps.

1.

NOTE:

The step must be carried out on both sides.

Install the luggage compartment lamps.

2. Connect the 2 electrical connectors.

3. Install the tailgate interior trim panel.

4.

- Connect the electrical connector.
- Install the power tailgate close switch.

5.

- Install and tighten the 2 bolts.
Torque: 7Nm
- Close the cover.

6. Secure the access cover.