
# 1998 XJ RANGE - Interior Trim and Ornamentation - 501-05

## Front Door Armrest 76.34.22

#### Removal


- 1. Remove battery cover and disconnect ground cable from battery terminal. Refer to <<86.15.19>>.
- 2. Remove door casing. Refer to <<76.34.01>>.

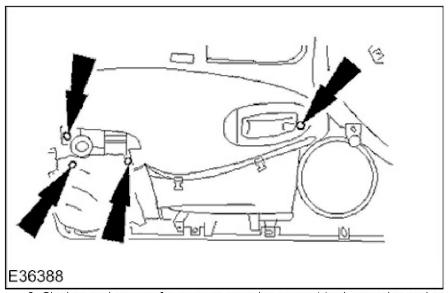


3. Slacken and remove four screws securing armrest to door casing and remove armrest from casing.

1 2010-09-25

# 1998 XJ RANGE - Interior Trim and Ornamentation - 501-05

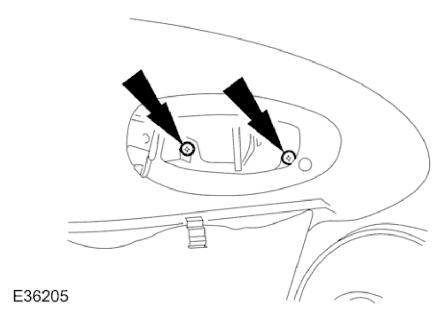

- 4. Remove switchpack from armrest.
  - 1. Slacken and remove two screws securing switchpack and finisher to armrest.
  - 2. Remove switchpack and finisher from armrest.

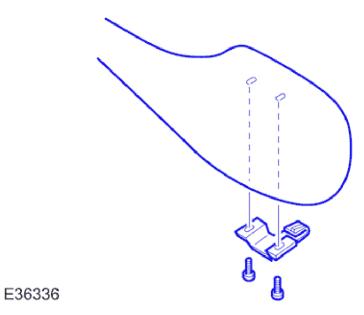

5. Slacken and remove two screws securing armrest retaining clip and remove clip from armrest.

#### Installation

2 2010-09-25

## 1998 XJ RANGE - Interior Trim and Ornamentation - 501-05

- 1. Position retaining clip on armrest and fit and tighten securing screws.
- 2. Position switchpack and finisher on armrest and fit and tighten securing screws.
- 3. Position armrest on casing and fit and tighten four securing screws.
- 4. Fit casing to door. Refer to <<76.34.01>>.
- 5. Connect ground cable to battery and fit battery cover. Refer to <<86.15.15>>.

3 2010-09-25