


# ROUTINE CHECKS

Reservoir and Dipstick Locations (3.2 litre and 4.0 litre normally-aspirated)

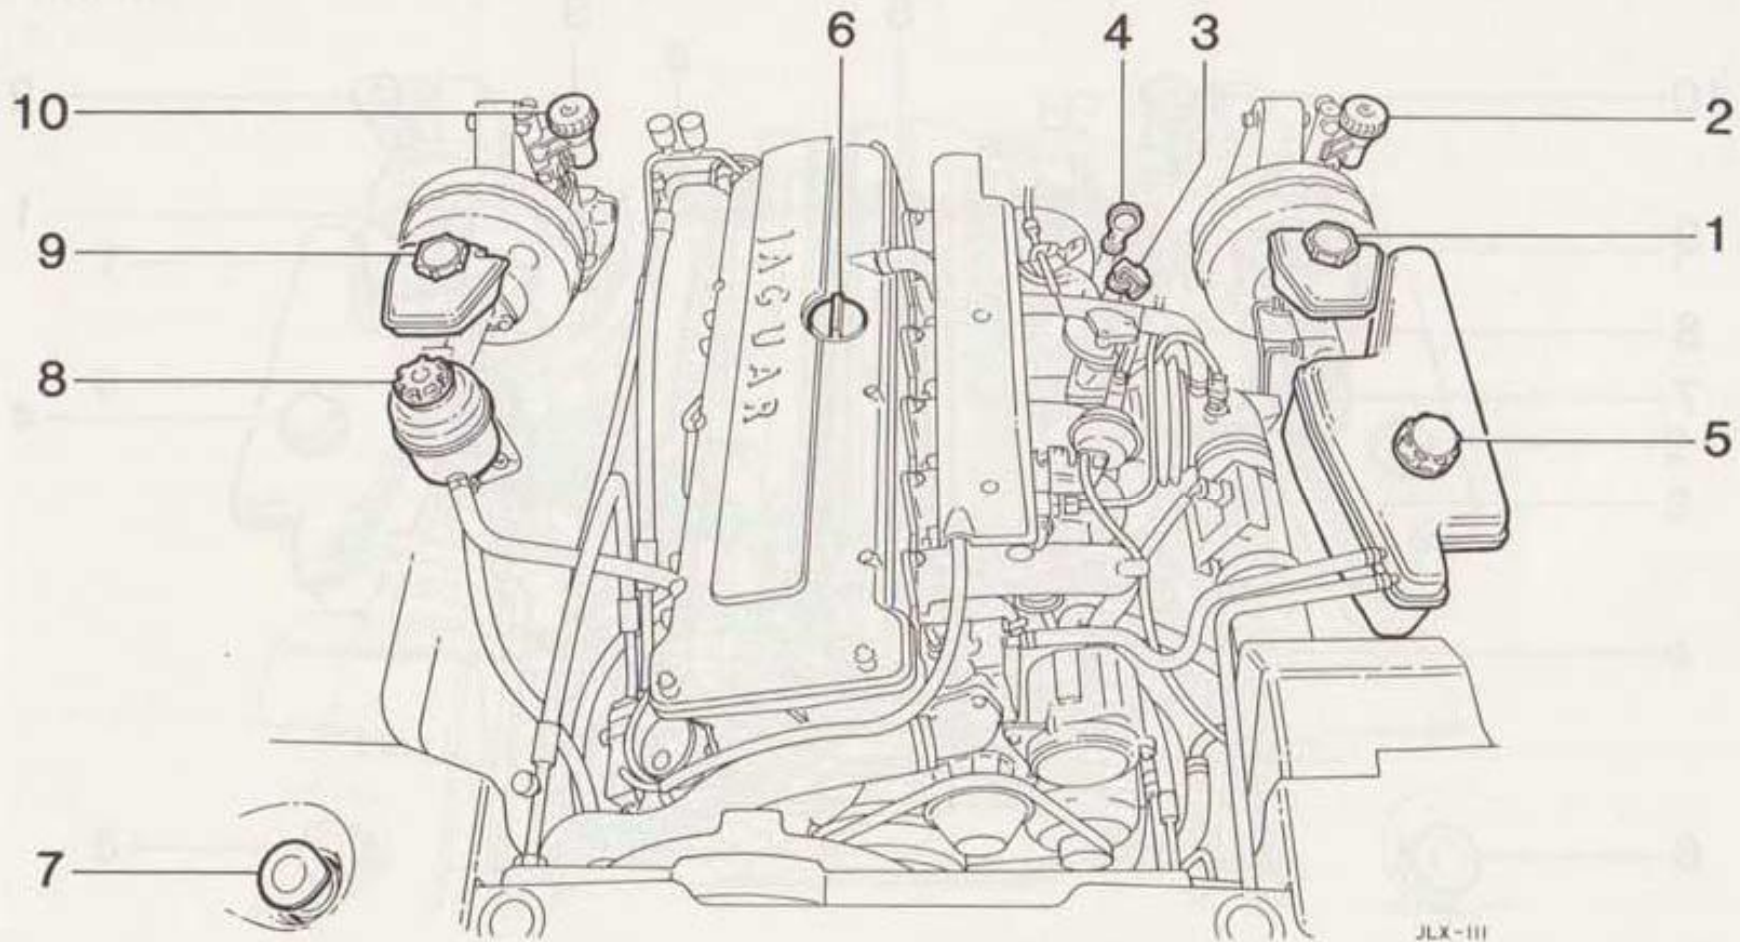

1. Brake fluid reservoir (Left-hand drive vehicles).
2. Clutch fluid reservoir (Left-hand drive vehicles).
3. Automatic transmission fluid dipstick.
4. Engine oil dipstick.
5. Coolant filler pressure cap.
6. Engine oil filler.
7. Windscreen washer reservoir.
8. Power steering reservoir.
9. Brake fluid reservoir (Right-hand drive vehicles).
10. Clutch fluid reservoir (Right-hand drive vehicles).

## ROUTINE CHECKS

### Check/Top Up Power Steering Fluid Reservoir

**Caution:** It is imperative that the power steering system does not become contaminated in any way. Always dispense fluid from a fresh sealed container and clean the area around the reservoir neck both before and after topping-up. Never return drained fluid to the system.

See pages 19 to 21 for power steering fluid reservoir location. Check the fluid level when the engine is 'COLD' and the vehicle is on a flat, level surface.

Wipe clean and remove the filler cap from the reservoir; take great care to prevent any foreign matter from entering.

Check that the fluid level is between the marks on the dipstick. If necessary, top up with the correct specification fluid, DO NOT OVERFILL. The lubricants and fluid specifications are detailed on page 33.

Should the level be very low, report the loss of fluid to the nearest Jaguar Dealer.

