

Front Door Trim Panel (76.34.01)

Removal

- 1 . Remove the exterior mirror trim panel.
 - Release the 3 clips.
 - **Disconnect** the electrical connector.



- 2. Release the front door trim panel.
 - Remove the bolt cover.
 - Remove the 3 Torx bolts.
 - Release the 16 clips.




3 . **NOTE:**


Do not disassemble further if the component is removed for access only.

Remove the front door trim panel.

- Release the front door interior handle cable.
- Disconnect the 2 electrical connectors.

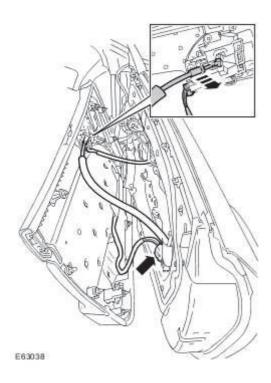


- 4. Remove the front door latch remote control handle.
 - Release from the 5 clips.




5 . Remove the grab handle cover.


Release from the 6 clips.



- 6. Remove the window control switch.
 - Release from the 3 clips.
 - **Disconnect the electrical connector.**

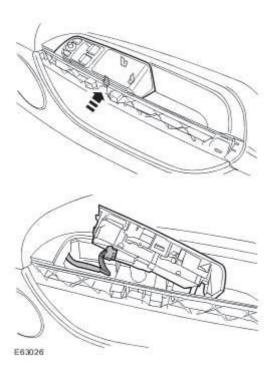

- 7 . Remove the seat control switch.
 - Remove the 4 Torx screws.
 - Disconnect the electrical connector.



Installation

- 1. Install the seat control switch.
 - Connect the electrical connector.
 - Install and tighten the Torx screws.
- 2. Install the window control switch.
 - Connect the electrical connector.
 - Secure in the clips.
- 3. Install the grab handle cover.
 - Secure in the clips.
- 4. Install the front door latch remote control handle.
 - Secure in the clips.
- CAUTION: Make sure that the cable remains correctly installed to the front door trim panel.

Install the front door trim panel.

- Attach the front door interior handle cable.
- Connect the electrical connectors.
- 6. Secure the front door trim panel.
 - Secure in the clips.
 - Tighten the Torx bolts to 10 Nm.
 - Install the bolt cover.
- 7. Install the exterior mirror trim panel.

- Connect the electrical connector.
- Secure with the clips.
- 8 Check the operation of the door latch remote control handle.
 - With the door closed, check the latch operation of the door latch remote control handle.
 - With the door closed, check the lock operation of the door latch remote control handle.